


DORAL WOODS REQUIREMENTS - BOXED WITH TOP AND BOTTOM PLANKS

**WOOD FENCE DESIGN DETAIL**

N.T.S. (ACCORDING TO THE F.B.C. SECTION 2328)

ALL NAILS AND CONNECTIONS SHALL BE GALVANIZED

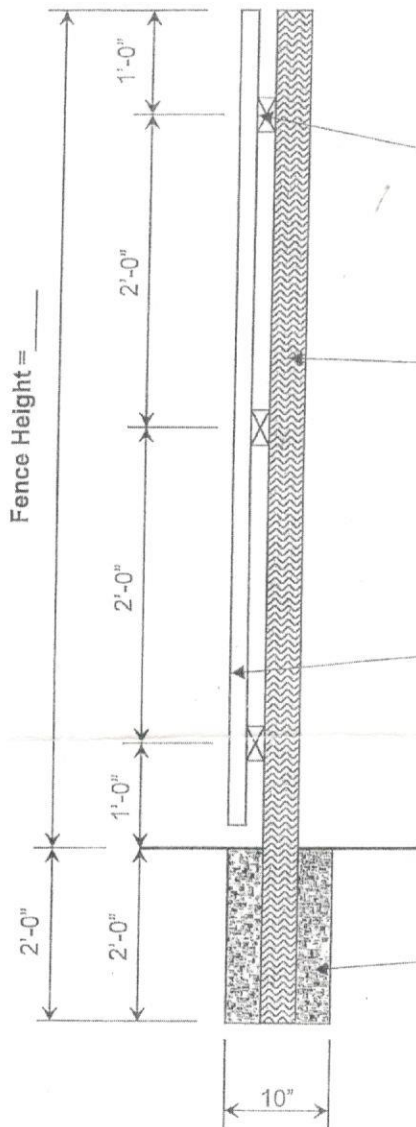

2"X4" No. 3 WOOD RAILS (3) MINIMUM ATTACHED TO WOOD POST WITH MINIMUM (4) 10D NAILS.

4" X 4" X 8' P.T. No. 2 Grade or Better WOOD POST

Fence Height Above Grade	Post Spacing
6'-0"	4'-0"
5'-0"	5'-0"
4'-0"	6'-0"

5/8" WOOD PICKET MIN. DRESSED THICKNESS. ATTACH EACH PICKET TO RAILS WITH (2) 6d GALV. NAIL OR #10 GALV. SCREW.

10" DIAMETER CONCRETE FOOTING

**Pre-Fab Wood Fence Panels:**

Pre-assembled wood fence panels sold in hardware stores are not covered by this detail. Applicant must obtain the *Notice of Acceptance Product Approval* from the store, submit it for permit and build the fence according to that document.

**Notice to Properties with Pools:**

If the fence is to meet the criteria as a **pool barrier**, the fence shall not be climbable and all rails must be placed facing the inside of the property. Pedestrian gates shall have self-closing and latching devices installed at a minimum of 54" above ground. For further details see Section 424 of FBC.

**NOTICE: A MANDATORY FOOTING INSPECTION IS REQUIRED PRIOR TO POURING CONCRETE.**